
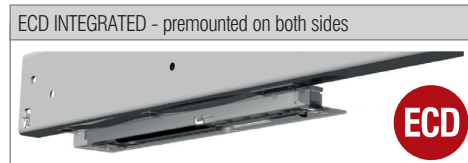


# FR 7180 ECD

|                    |                                                  |
|--------------------|--------------------------------------------------|
| <b>SLIDE TYPE:</b> | Full-Extension Drawer Slide - Progressive-Action |
| <b>MOUNTING:</b>   | Bottom Mount                                     |




|                       |                                  |
|-----------------------|----------------------------------|
| <b>WIDTH:</b>         | 24 mm                            |
| <b>LOAD CAPACITY:</b> | dynamic up to 200 kg (full-ext.) |

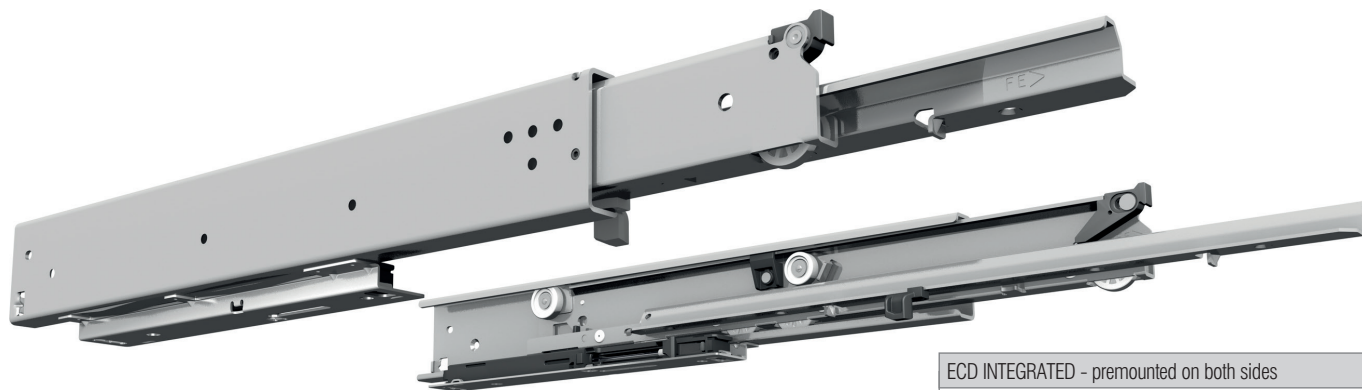

|                  |                                         |
|------------------|-----------------------------------------|
| <b>MATERIAL:</b> | steel, galvanized or white powdercoated |
|------------------|-----------------------------------------|

|                  |                       |
|------------------|-----------------------|
| <b>FEATURES:</b> | solid delrin* rollers |
|------------------|-----------------------|

|                                                                                                                                                                                                                                                                                                                                                                                |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>SPECIFICATIONS &amp; NOTES:</b>                                                                                                                                                                                                                                                                                                                                             |
| <ul style="list-style-type: none"> <li>▶ cabinet and drawer profile with screw holes</li> <li>▶ high lateral stability through specially formed middle profile and guide rollers</li> <li>▶ ideal running characteristic and smoothness of running</li> <li>▶ safety clip mounted in middle profile</li> <li>▶ double-sided captive profile</li> <li>▶ self-closing</li> </ul> |
|  <b>Easy Close Device (ECD)</b> integrated                                                                                                                                                                                                                                                  |

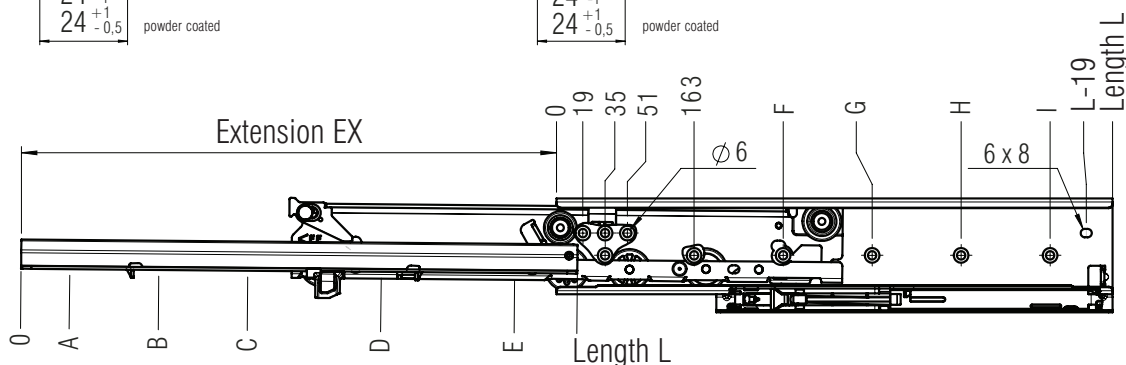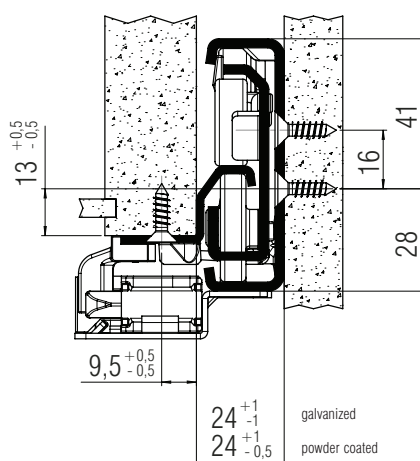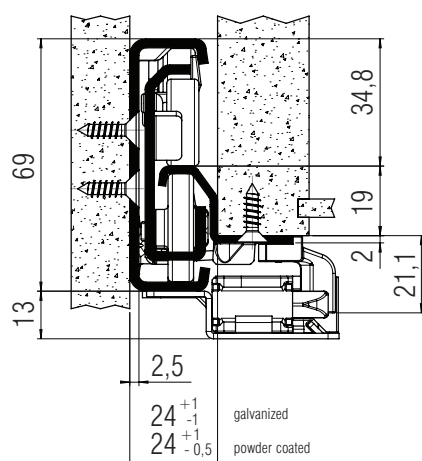

screw holes for 4,5 mm spax screws

| L<br>mm | EX<br>full-ext. | A<br>mm | B<br>mm | C<br>mm | D<br>mm | E<br>mm | F<br>mm | G<br>mm | H<br>mm | I<br>mm | Weight<br>per pair (kg) | Order No.<br>galvanized | Order No.<br>white |
|---------|-----------------|---------|---------|---------|---------|---------|---------|---------|---------|---------|-------------------------|-------------------------|--------------------|
| 400     | 385             | 46      | 238     | 366     |         |         | 323     | 387     |         |         | 4,67                    | ▶ 4403                  | ▶ 4433             |
| 450     | 435             | 32      | 288     | 416     |         |         | 355     | 419     |         |         | 5,15                    | ▶ 4404                  | ▶ 4434             |
| 500     | 485             | 50      | 146     | 370     | 466     |         | 291     | 451     |         |         | 5,62                    | ▶ 4405                  | ▶ 4435             |
| 550     | 535             | 36      | 196     | 420     | 516     |         | 323     | 483     |         |         | 6,08                    | ▶ 4406                  | ▶ 4436             |
| 600     | 585             | 22      | 246     | 438     | 566     |         | 355     | 547     |         |         | 6,54                    | ▶ 4407                  | ▶ 4437             |
| 650     | 635             | 40      | 296     | 488     | 616     |         | 355     | 611     |         |         | 6,98                    | ▶ 4808                  | ▶ 4438             |
| 700     | 685             | 26      | 186     | 346     | 538     | 666     | 355     | 515     | 643     |         | 7,50                    | ▶ 4409                  | ▶ 4439             |
| 750     | 735             | 44      | 204     | 396     | 588     | 716     | 355     | 547     | 675     |         | 8,08                    | *                       | *                  |
| 800     | 785             | 30      | 190     | 446     | 638     | 766     | 355     | 611     | 739     |         | 8,67                    | ▶ 4411                  | ▶ 4441             |
| 850     | 835             | 48      | 240     | 464     | 688     | 816     | 355     | 611     | 771     |         | 9,15                    | *                       | *                  |
| 900     | 885             | 34      | 290     | 578     | 738     | 866     | 355     | 611     | 835     |         | 9,63                    | ▶ 4413                  | ▶ 4443             |
| 950     | 935             | 20      | 340     | 628     | 788     | 916     | 355     | 611     | 771     | 899     | 10,11                   | *                       | *                  |
| 1000    | 985             | 38      | 390     | 646     | 838     | 966     | 355     | 611     | 771     | 931     | 10,58                   | ▶ 4415                  | ▶ 4445             |

Packing Unit: 2 sets per box; 800 - 1000 mm: 1 set per box

▶ prompt delivery \*on request

**Fulterer**

\*DuPont (TM) Delrin®