

Ironw@re

Onzichtbaar schuifdeursysteem
voor glas






Code Guide


Onzichtbaar glas		COMPLETE BOX KIT			
K	Complete kit				
	.				
	0041		1100 mm - 80kg		
	0042		1800 mm - 80kg		
		.			
			1	Glass thk. 8 mm (5/16")	
			2	Glass thk. 10 mm (3/8")	
			3	Glass thk. 12 mm (1/2")	
			.		
			02	Brushed Anodized Silver	

EXAMPLE

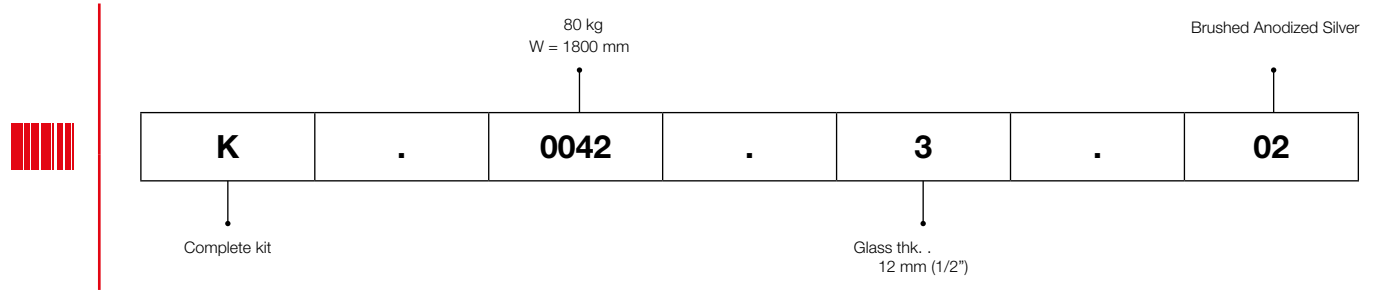

dressing rooms



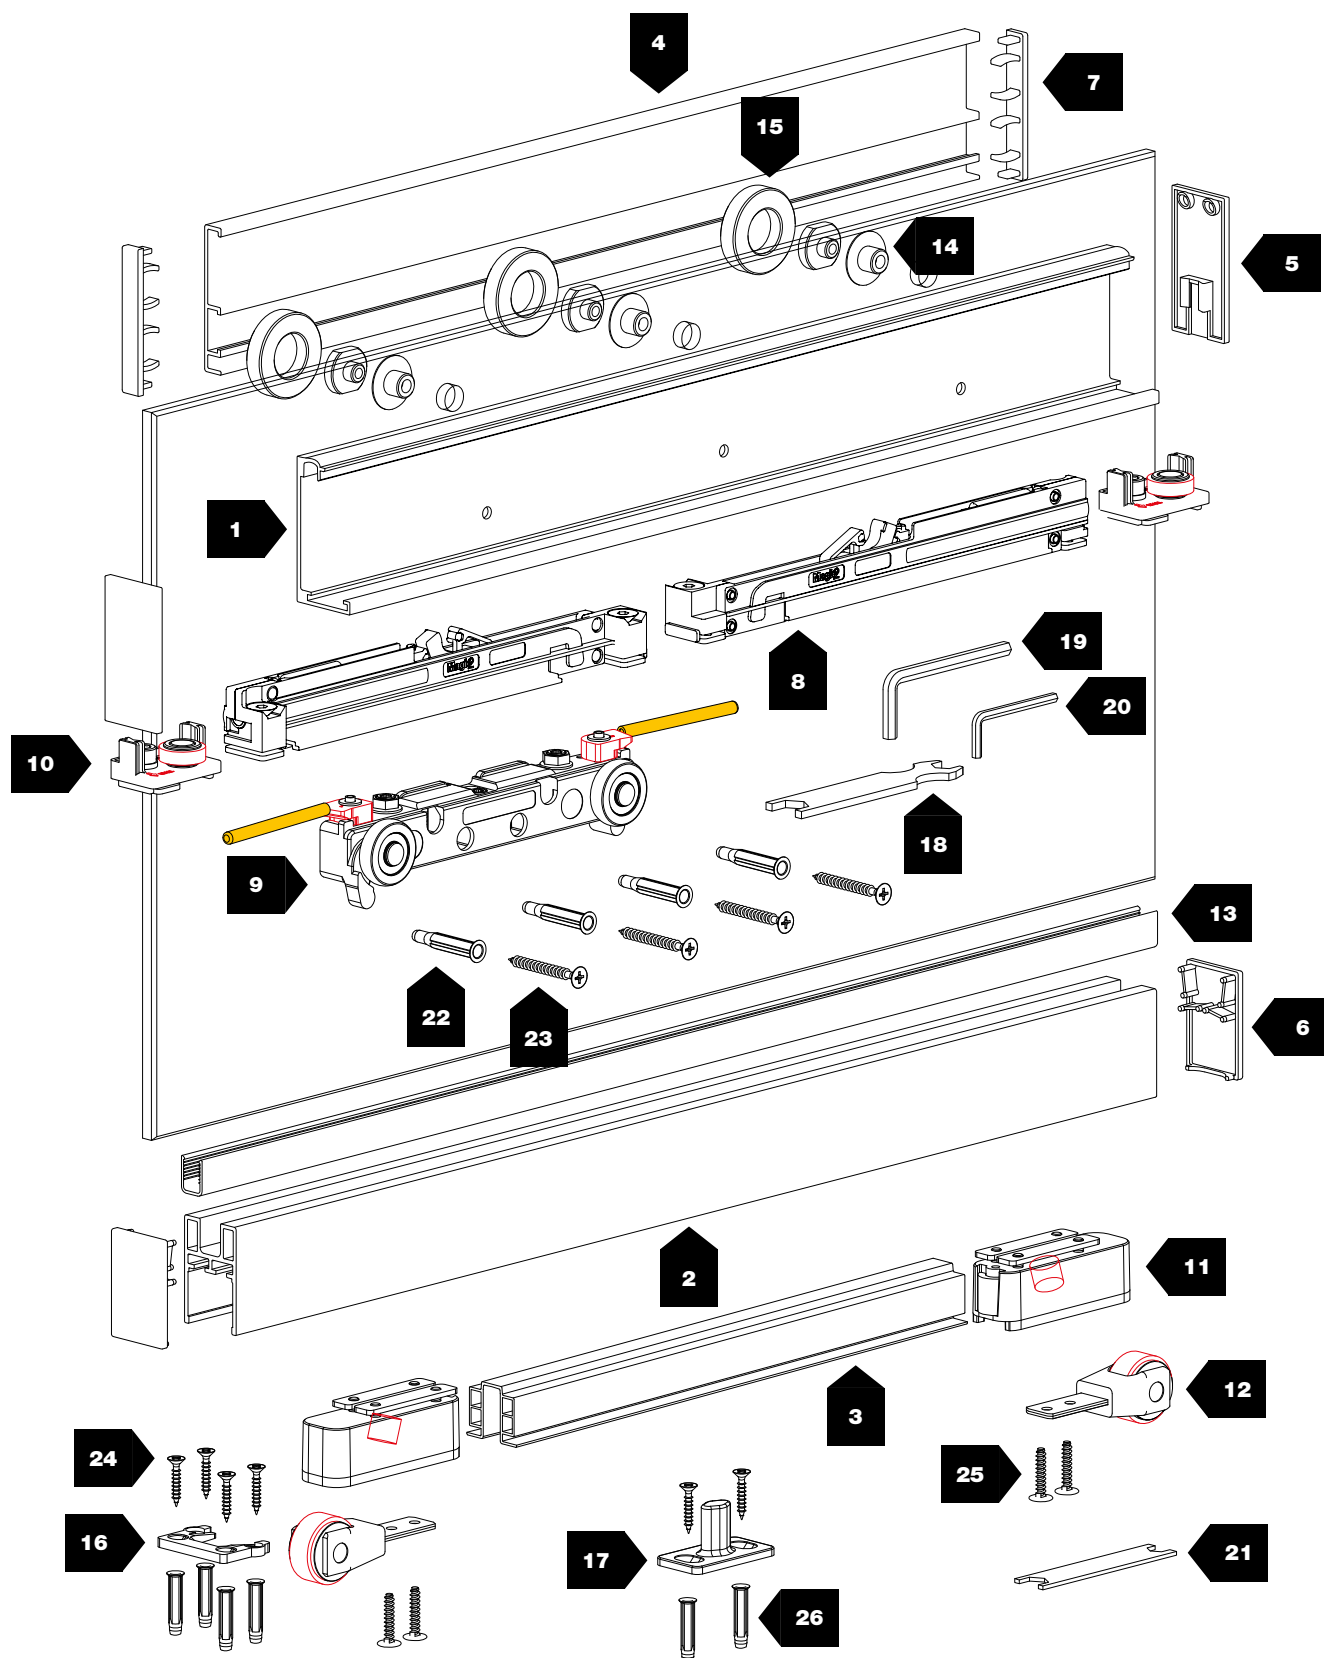















680 ÷ 1800 mm




80 kg




10 mm





N°			kg		N°			kg	
1	2850		—		12	2857		—	
2	2863		—	Glass thk. Vetri sp. 8 mm (5/16")	13	2193		—	
	2862			Glass thk. Vetri sp. 10 mm (3/8")	14	2195		—	
	2861			Glass thk. Vetri sp. 12 mm (1/2")	15	2197/A		—	
3	2860		—		16	2859		—	
4	2198		—		17	2855		—	
5	2851/N		—		18	1025		—	
	2851/A				19	538		—	
6	2866		—		20	654		—	
7	2199		—		21	1164		—	
8	2864-80		80		22	FISCHER UX6		—	
9	2852		80		23	4,5x40		—	
10	2856		—		24	4x30		—	
11	2858		—		25	4x20		—	
					26	FISCHER SX5		—	

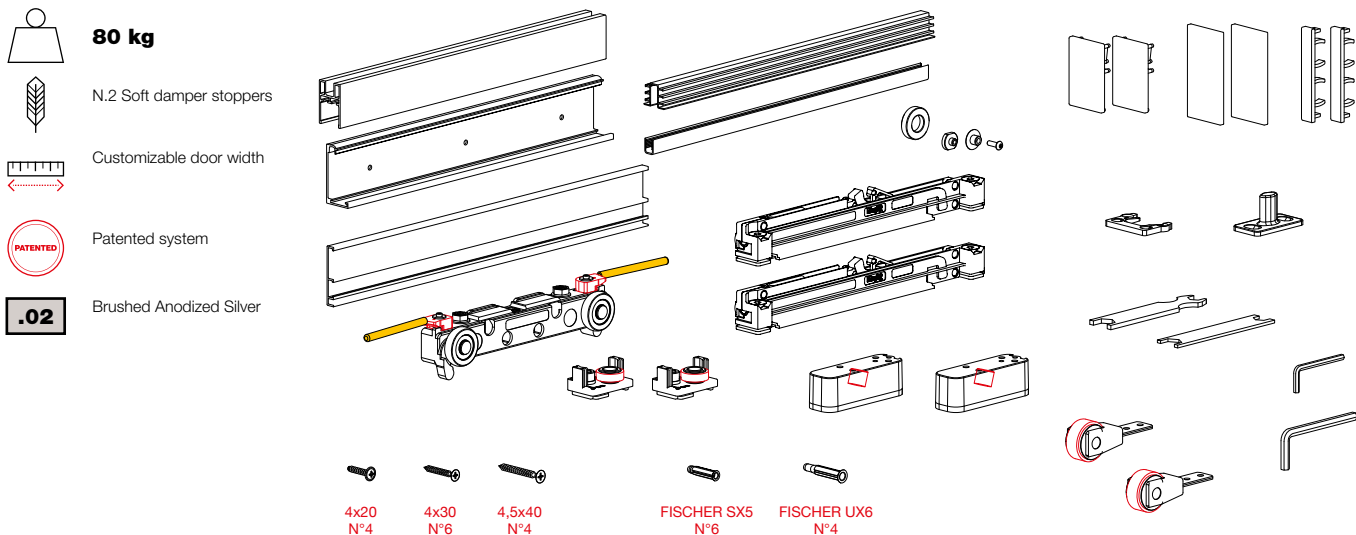


MEASUREMENTS DESCRIPTION

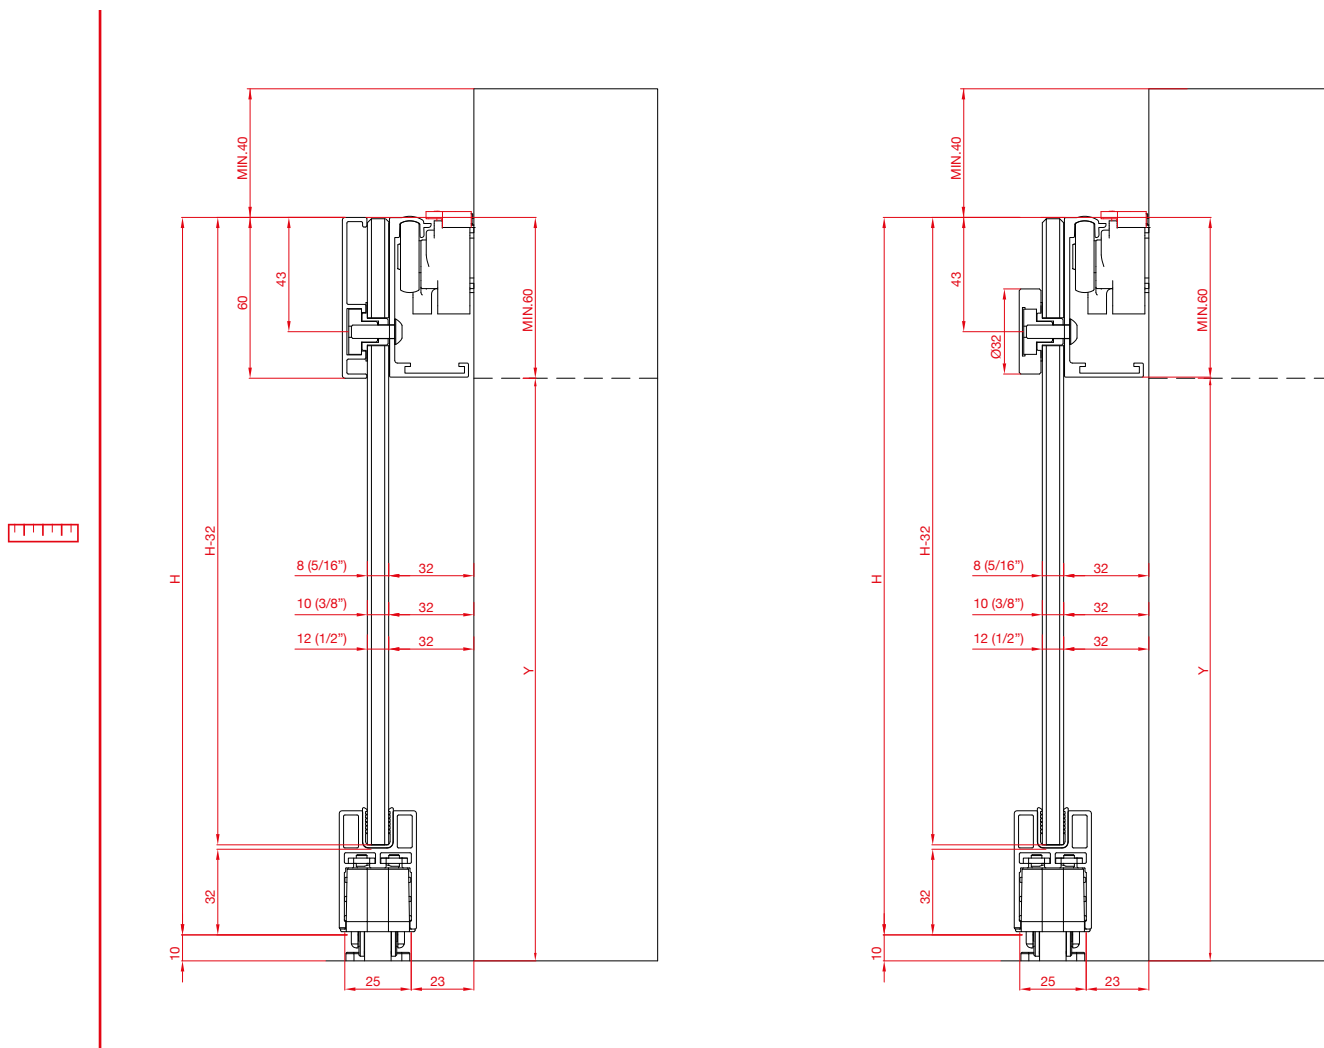


MILLING DESCRIPTION

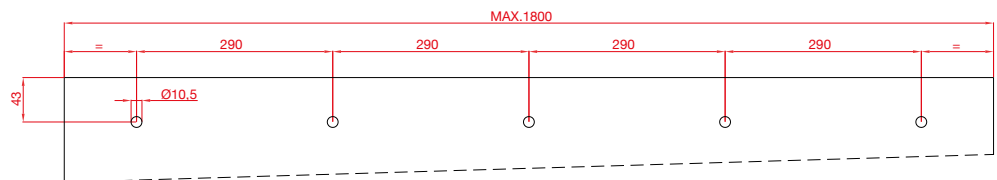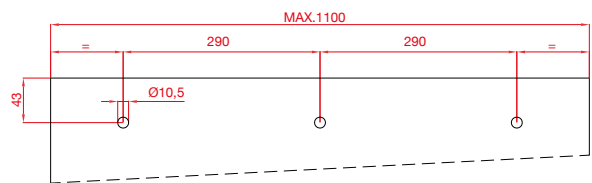

PROFILES CUTTING MEASUREMENTS

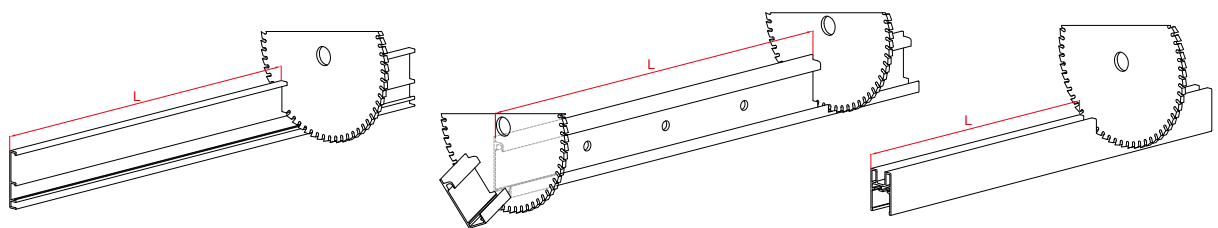

ART. 2199

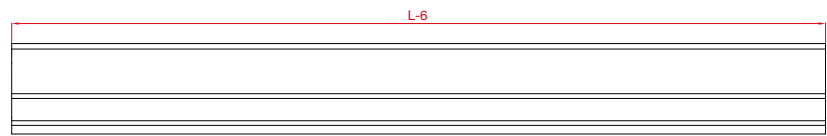


ART. 2198



ART. 2199




ART. 2851

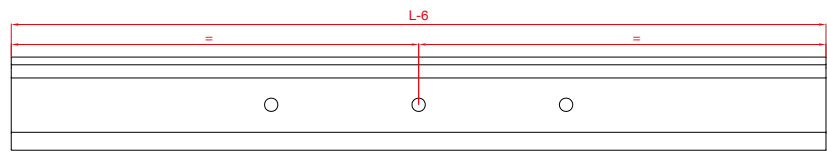


ART. 2850




ART. 2851




ART. 2866



ART. 2863 - ART. 2862 - ART. 2861




ART. 2866




ART. 2860



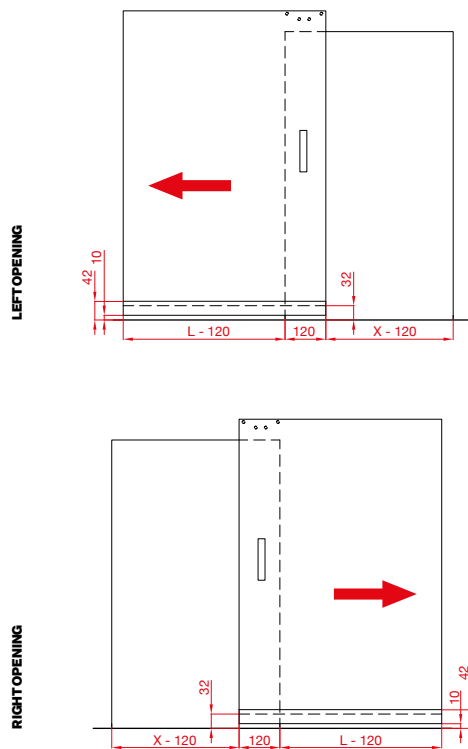

B=0 mm (Min.)
B=50 mm (Suggested)

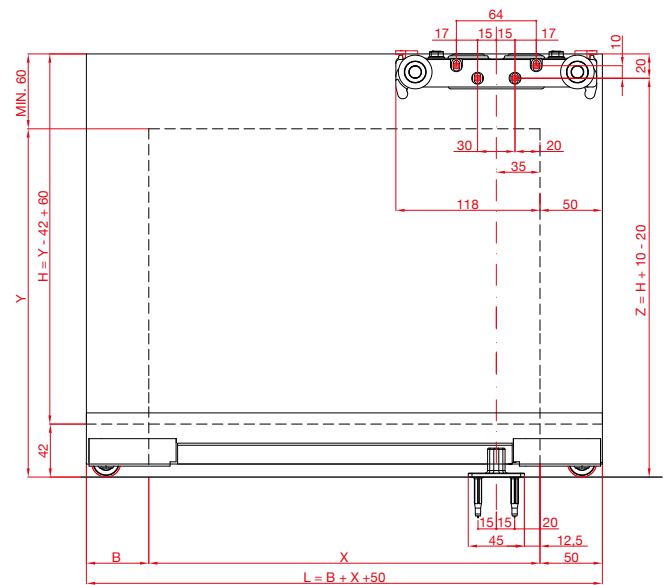

1100/V/08 - 1100/V/10 - 1100/V/12

1800/V/8 - 1800/V/10 - 1800/V/12


B=0
X= MIN. 800 (L=850)
X= MAX. 1050 (L=1100)

B=50
X= MIN. 800 (L=900)
X= MAX. 1000 (L=1100)


B=0
X= MIN. 800 (L=850)
X= MAX. 1750 (L=1800)

B=50
X= MIN. 800 (L=900)
X= MAX. 1700 (L=1800)

ACCESSORIES PLACEMENT (INTERMEDIATE POSITION)

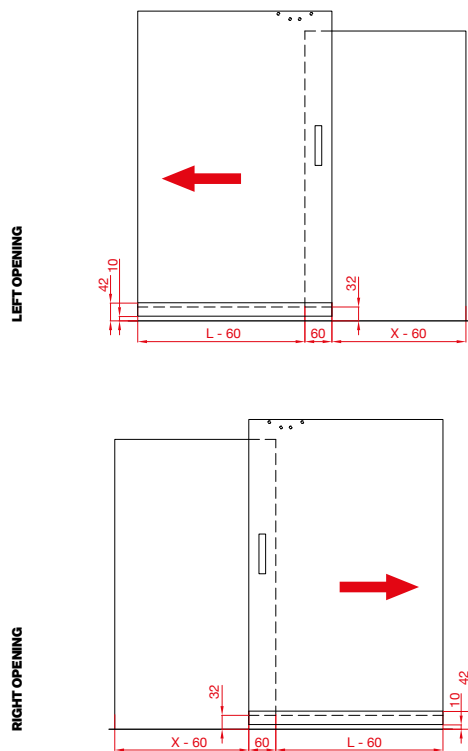

B=0 mm (Min.)
B=50 mm (Suggested)

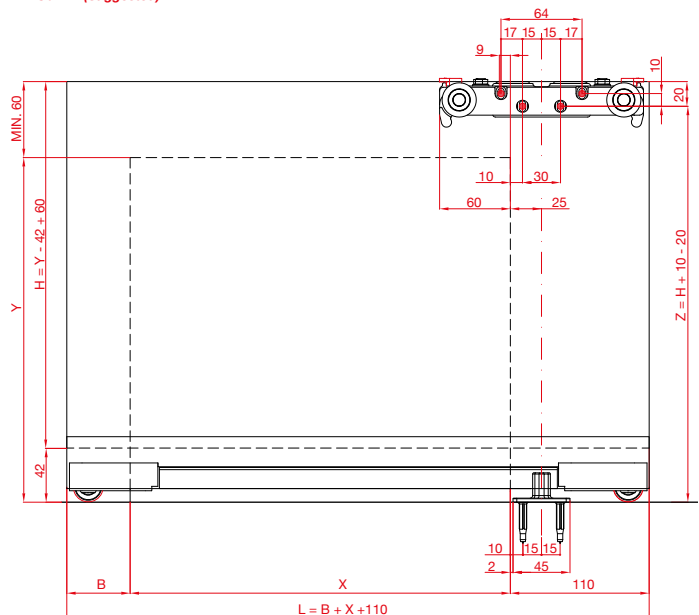

1100/V/08 - 1100/V/10 - 1100/V/12

1800/V/8 - 1800/V/10 - 1800/V/12


B=0
X= MIN. 740 (L=850)
X= MAX. 990 (L=1100)

B=50
X= MIN. 740 (L=900)
X= MAX. 940 (L=1100)


B=0
X= MIN. 740 (L=850)
X= MAX. 1690 (L=1800)

B=50
X= MIN. 740 (L=900)
X= MAX. 1640 (L=1800)

ACCESSORIES PLACEMENT (TOTAL OPENING POSITION)

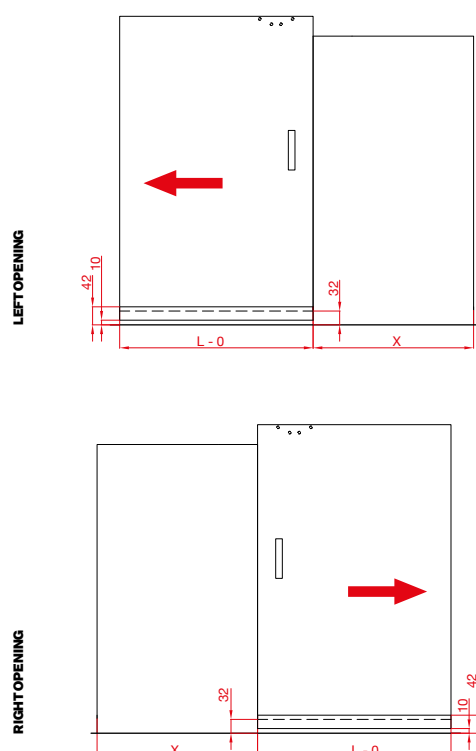

B=0mm (Min.)
B=50mm (Suggested)

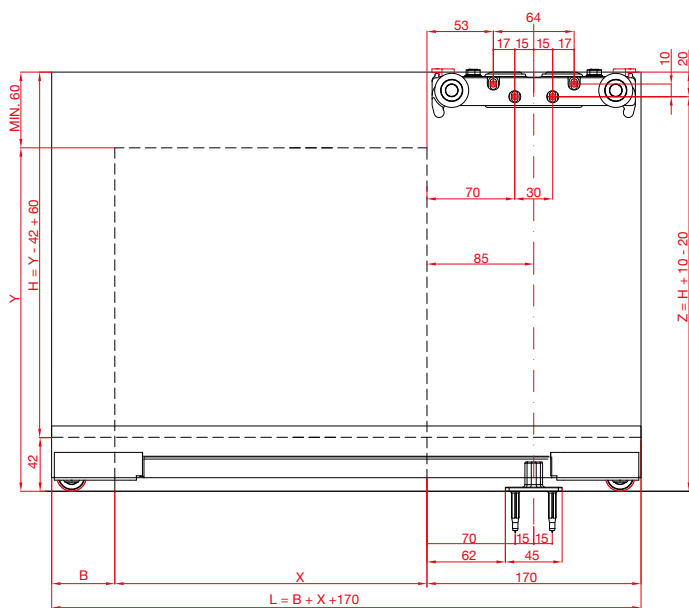

1100/V/08 - 1100/V/10 - 1100/V/12

1800/V/8 - 1800/V/10 - 1800/V/12




B=0
X= MIN. 680 (L=850)
X= MAX. 930 (L=1100)

B=50
X= MIN. 680 (L=900)
X= MAX. 880 (L=1100)



B=0
X= MIN. 680 (L=850)
X= MAX. 1630 (L=1800)

B=50
X= MIN. 680 (L=900)
X= MAX. 1580 (L=1800)

ART. 2859 - END STOPPER

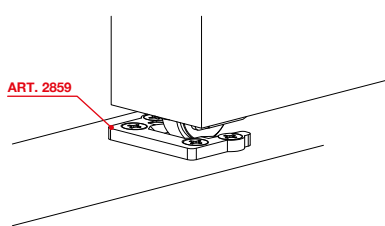

ALUMINIUM TRACK FOR IRREGULAR FLOOR

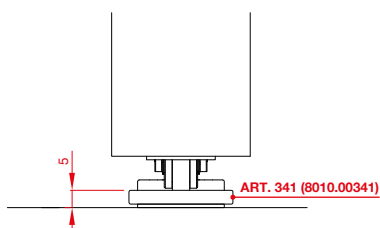

ALUMINIUM PROFILE

ADHESIVE

ART. 341
(8010.00341)

ART. 341

8 01 0.00341